

TC & RTD Isolated Barrier



NPEXA-C01H NPEXA-C011H

Single input, single output

Single input, double outputs

Input: TC, RTD
Output: 4 ~ 20 mA

Temperature input isolated barrier, it converts the thermocouple or thermal resistance signals from a hazardous area into 4~20mA signals to a safe area by isolation. It has external cold junction compensation terminals. It needs an independent power supply. The input, output, and power supply are galvanically isolated from each other. The self-test function is also available on this device. Calibrate the apparatus or modify parameters by using a handheld programmer.


Parameters

- Power supply: 18V DC ~ 60V DC (Reverse power protection)
- Power dissipation: 0.8W (single output)
1.2W (double outputs)
- Input signal: TC, RTD
- Line resistance: $\leq 20\Omega$ per line (RTD)
- Output signal: 4 ~ 20mA (sink/source)
- Load resistance: source: $R_L \leq 550\Omega$ sink: $R_L < [(U-3)/0.02]\Omega$;
U: Loop power supply
- Compensation accuracy: 1°C (Temperature compensation range:
 $-20^\circ\text{C} \sim +60^\circ\text{C}$)
- Temperature drift: 30ppm/ $^\circ\text{C}$
- Response time: $\leq 500\text{ms}$
- Electromagnetic compatibility: IEC 61326-3-1
- Dielectric strength: $\geq 3000\text{V AC}$ (intrinsically safe side / non-intrinsically safe side)
 $\geq 1500\text{V AC}$ (Power supply /non-intrinsically safe side)
- Insulation resistance: $\geq 100\text{M}\Omega$ (Input /Output/Power supply)
- Operation temperature: $-20^\circ\text{C} \sim +60^\circ\text{C}$
- Storage temperature: $-40^\circ\text{C} \sim +80^\circ\text{C}$
- Dimension: 17.8mm (W) \times 110mm (H) \times 117mm (D)
- Output states: Default following mode, it can be configured as 4mA~20mA NE43 mode or fixed output mode.


Conversion accuracy list ($25^\circ\text{C} \pm 2^\circ\text{C}$, without Cold junction compensation)

Standards	Type	Range	Min.span/Accuracy
IEC 60584-1	K	-200~1372 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
	E	-120~1000 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
	J	-140~1200 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
	T	-270~400 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
	N	-200~1300 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
	S	-50~1768 $^\circ\text{C}$	$<500^\circ\text{C}$, $\pm 0.5^\circ\text{C}$; $\geq 500^\circ\text{C}$, $\pm 0.1\%$ F.S.
	R	-50~1768 $^\circ\text{C}$	$<500^\circ\text{C}$, $\pm 0.5^\circ\text{C}$; $\geq 500^\circ\text{C}$, $\pm 0.1\%$ F.S.
	B	400~1820 $^\circ\text{C}$	$<500^\circ\text{C}$, $\pm 0.5^\circ\text{C}$; $\geq 500^\circ\text{C}$, $\pm 0.1\%$ F.S.
ASTM E988-96	W5Re-W26Re	0~2315 $^\circ\text{C}$	$<500^\circ\text{C}$, $\pm 0.5^\circ\text{C}$; $\geq 500^\circ\text{C}$, $\pm 0.1\%$ F.S.
	W3Re-W25Re	0~2315 $^\circ\text{C}$	$<500^\circ\text{C}$, $\pm 0.5^\circ\text{C}$; $\geq 500^\circ\text{C}$, $\pm 0.1\%$ F.S.
GOST R8.585	L	-100~800 $^\circ\text{C}$	$<300^\circ\text{C}$, $\pm 0.3^\circ\text{C}$; $\geq 300^\circ\text{C}$, $\pm 0.1\%$ F.S.
IEC 60751	Pt100($\alpha=0.00385$)	-200~850 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.
	Pt100($\alpha=0.00391$)	-200~850 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.
GOST 6651	Cu50($\alpha=0.00428$)	-180~200 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.
	Cu100($\alpha=0.00428$)	-180~200 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.
	Cu50($\alpha=0.00426$)	-50~200 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.
	Cu100($\alpha=0.00426$)	-50~200 $^\circ\text{C}$	$<100^\circ\text{C}$, $\pm 0.1^\circ\text{C}$; $\geq 100^\circ\text{C}$, $\pm 0.1\%$ F.S.

Note: Other sensor input types can be ordered.

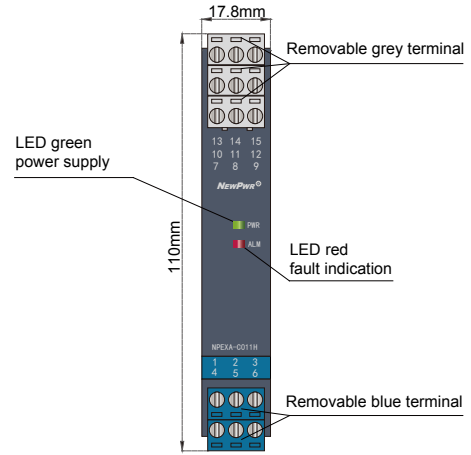

Wiring diagram

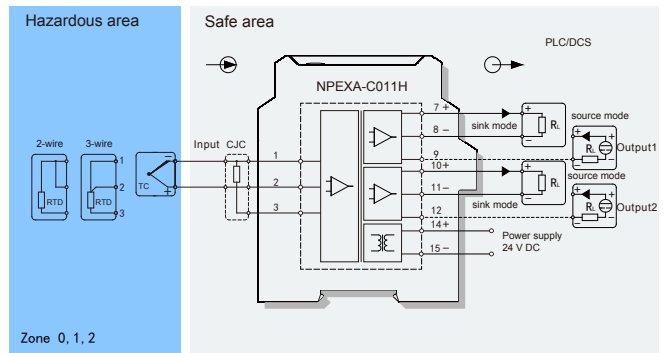

Explosive-proof parameters

China National Quality Supervision and Test Centre for Explosion Protected Electrical Products (CQST)

Ex marking: [Ex ia Ga] IIC

Um: 250V

Certified parameters (Terminals 1, 2, 3):

$U_o=8.7\text{V}$, $I_o=33\text{mA}$, $P_o=72\text{mW}$

$C_o=3.58\mu\text{F}$, $L_o=21\text{mH}$

Model rules

NPEXA-C0 H

- PB: BUS powered
- Default: Terminals powered
- The second output signal^{note1}
- Default: null
- The first output signal^{note1}

note1: output signal

Number	Output signal
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA